



This manual is for reference and historical purposes, all rights reserved.

**This page is copyright© by M. Butkus, NJ.**

This page may not be sold or distributed without the expressed permission of the producer

I have no connection with any camera company

On-line camera manual library

This is the full text and images from the manual. This may take 3 full minutes for the PDF file to download.

**If you find this manual useful, how about a donation of \$3 to: M. Butkus, 29 Lake Ave., High Bridge, NJ 08829-1701 and send your e-mail address so I can thank you. Most other places would charge you \$7.50 for a electronic copy or \$18.00 for a hard to read Xerox copy.**

**This will allow me to continue to buy new manuals and pay their shipping costs.**

**It'll make you feel better, won't it?**

**If you use Pay Pal or wish to use your credit card,  
click on the secure site on my main page.**

# Minolta SR **T** 101

**OWNER'S MANUAL**



Since the inception of through-the-lens exposure measuring for single lens reflex cameras, several systems have been developed. Some "spot" read only a very small percent of the total area. Other systems provide an "average" reading comprised of independent measurements taken by two cells which are not accurate in high-contrast situations.

Only the Minolta SR-T 101 has an exclusive new type of circuit (CLC) to provide an optimum reading of the entire picture area regardless of degree of contrast.

In addition to its more accurate exposure meter system, your Minolta SR-T 101 is designed to handle more easily, with greater speed, than other "through-the-lens metering" cameras.

The ability to compose, focus, set exposure and shutter speed without looking away from the finder makes the Minolta SR-T 101 particularly suitable for professional photography...when operating speed is often of vital importance.

(All illustration used in this booklet are with the F/1.4 lens. There is, however, no fundamental difference in usage between the F/1.4 and F/1.7 lens.)

---

## Contents

---

Camera Parts .....	2	Flash Photography .....	31
Major Features of the Minolta SR-T 101 .....	4	Attaching Flash Unit .....	31
Specifications of the Minolta SR-T 101.....	4	Exposure for Flash Photography .....	32
Before Using Your Minolta SR-T 101.....	6	How to Unload the Film .....	32
Insert the Mercury Battery.....	6	Changing Lenses.....	34
How to Use the Battery Checker .....	7	Using Interchangeable Rokkor Lenses other than MC Lenses .....	35
A Quick Guide to Using Your Minolta SR-T 101.....	8	Auto Rokkor Lenses.....	35
Film Loading.....	10	Manual Pre-Set Rokkor Lenses .....	36
Shutter Speed and Aperture Settings.....	13	Maintenance and Care of the Camera.....	37
TTL with CLC, A New Exposure Measuring System.....	15	Interchangeable Rokkor Lenses for Minolta SR-T 101....	38
ASA/DIN Converting Scale .....	16		
Setting the Correct Exposure .....	17		
Holding the Camera .....	20		
Focusing .....	21		
Lens Aperture Controls Depth-of-Field .....	22		
Depth-of-Field Table of MC Rokkor 58mm F/1.4 Lens...24			
Depth-of-Field Table of MC Rokkor 55mm F/1.7 Lens...25			
Checking the Effects of Aperture Setting on Depth-of-Field...27			
Mirror Lock-Up Control.....	28		
How to Use the Self-Timer .....	29		
Infrared Mark for Infrared Photography .....	30		
⊖ Symbol Aides Close-Up Photography .....	30		

## Camera Parts

Film Rewind and Back Cover Open Knob

Accessory Shoe

Pentaprism

Shutter and ASA Speed Dial

Film Advance Lever

Shutter Release Button

Film Counter

Meter Coupler

Lens Release Button

Diaphragm Ring

Mirror Lock-Up Button

Depth-of-Field Scale


Self-Timer Lever


Distance Scale

Diaphragm Stop-Down Button

Focusing Ring

Rokkor Lens

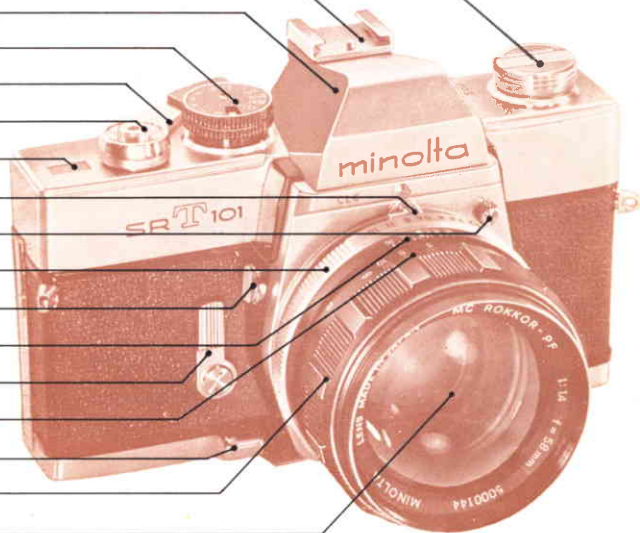

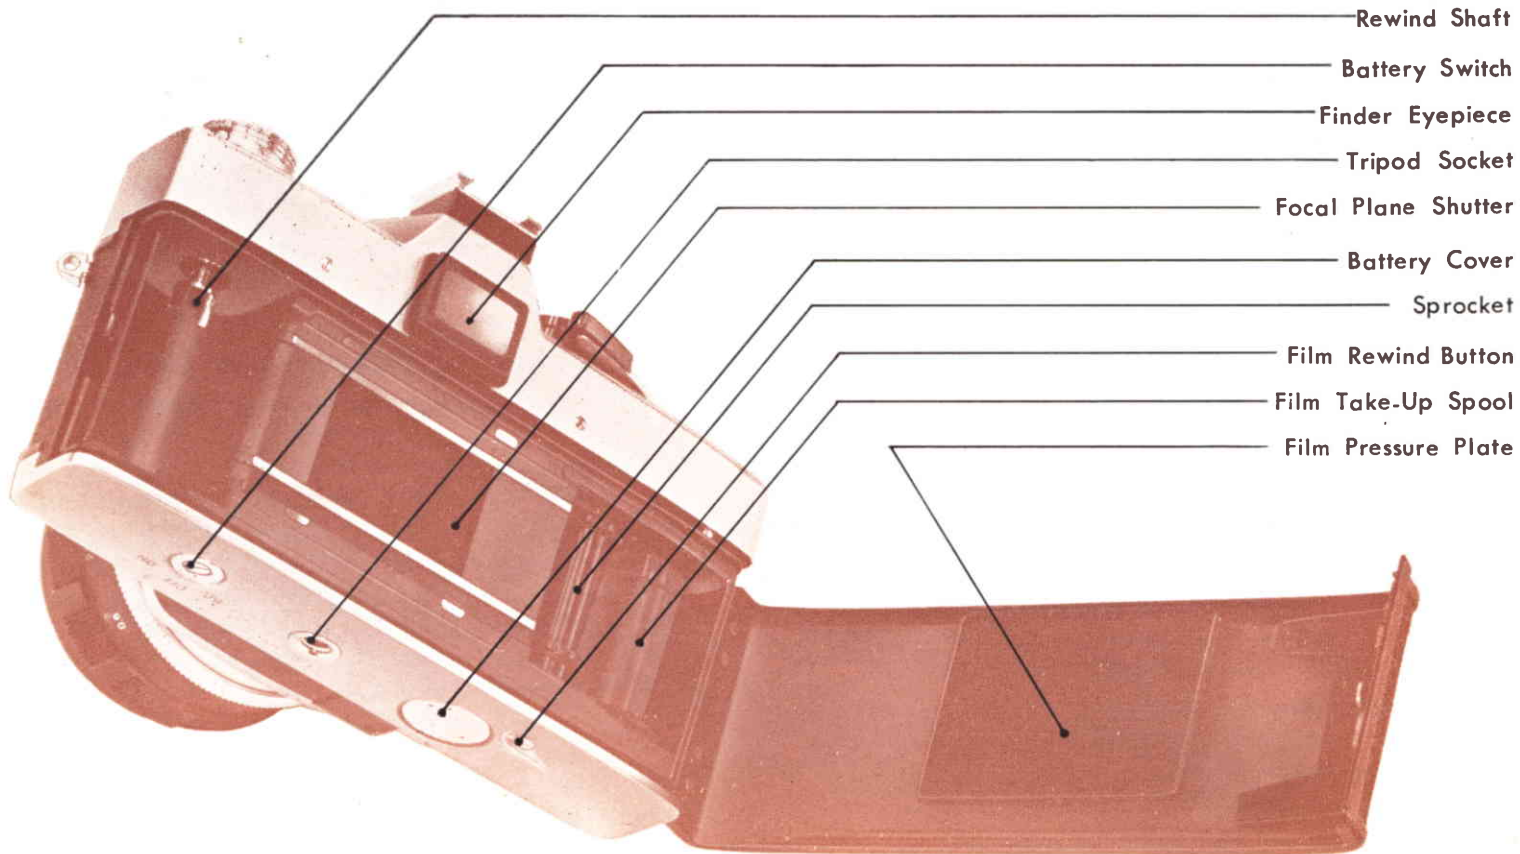

## Major Features of the Minolta SR-T 101

### 1. Rapid-Reading Through-the-Lens Exposure System

- a) Exposure readings taken with lens at full aperture for rapid composing and focusing regardless of subject brightness.
- b) "Follower type" needles in viewfinder show correct exposure at a glance...at any combination of aperture and shutter speed.
- c) Shutter speed scale is visible in viewfinder but outside of "live" picture area.
- d) Measures only the light that strikes the film, thus eliminating the need to compensate for changes in lens focal length or to compute exposure factors for filters, bellows or other lens attachments.

### 2. Combines the Advantages of "Spot" and "Averaging" Exposure Reading Systems

- a) Exclusive "CLC" Metering System (Contrast Light Compensator) maintains extreme accuracy regardless of lighting situation, even with high-contrast subjects.
- b) Automatically corrects for changes in light intensity from one section of the picture area to another, thus providing an optimum overall reading.
- c) Oversized, instant return mirror prevents image cut-off and incorrect exposure readings no matter how long the focal length of lens.
- d) Unique positioning of CdS cells prevents incorrect readings due to light entering viewfinder.

### 3. World Renowned Rokkor Lenses

Superior resolving power resulting from the combination of rare earths, patented Achromatic coating and computer design.

### 4. Complete System of Lenses and Accessories for Maximum Versatility.

- a) All Rokkor lenses designed for use with the Minolta SR-1, SR-3 and SR-7 can be used as stopped-down measuring with the Minolta SR-T 101
- b) A variety of accessories are available to handle nearly any photographic situation.

## Specifications of the Minolta SR-T 101

-35mm single lens reflex camera with thru-the-lens exposure meter-

### Standard lens

MC Rokkor-PF 58mm F/1.4 (or 55mm F/1.7) equipped with meter coupler.

Composition:	6 elements in 5 groups
Coating:	Achromatic coating
Angle of view:	41° (43°)
Diaphragm:	Fully automatic
Diaphragm scale:	1.4, (1.7), 2, 2.8, 4, 5.6, 8, 11, 16 with equal space and intermediate click F-stop.

Filter mount:	55 $\phi$ (52 $\phi$ ), screw-in.
Shade mount:	57 $\phi$ (54 $\phi$ ), slip-on.
Lens mount:	SR bayonet mount

## Shutter

Focal plane shutter

Speeds: B, 1, 1/2, 1/4, 1/8, 1/15, 1/30, 1/60, 1/125, 1/250, 1/500, and 1/1000 sec.

Dial: Single, non-spinning, equal space, click stop dial.

Synchro contact: FP (all speeds) and X (up to 1/60sec.)

Self-timer: Time adjustable, 10 sec. maximum delay.

## Film advance

Lever type, quick advance winding with shutter cocking and double exposure prevention.

Winding method: Single or several strokes with clearance to wind (20°).

Winding angle: 150°

Film counter: Automatic resetting counter showing exposed frame number.

Film rewinding: Rapid rewinding with crank.

Frame size: 36 × 24mm

Film: Standard 35mm film, 20 or 36 exposures.

## Viewfinder

Real image finder through the fixed, eye-level pentaprism. Exposure control needles (follower type) and shutter speed scale are visible in finder.

Focusing glass: Fine microprism and Fresnel lens

Image magnification: Life size image viewing with 58 mm lens on infinity.

Viewing area: 33.7 × 22.4mm

## Exposure meter

Thru-the-lens meter

Exposure meter: Contrast light compensator (C.L.C.) CdS meter, two cells on the pentaprism.

Measurement: Measuring at full-aperture opening coupled to shutter speed, aperture and film speed setting.

Controlling: Follower needle system viewing in the finder.

Working range: EV 3 to EV 17 on 100 ASA film.

Diaphragm button: Depth-of-field preview button for MC (meter coupling) Rokkor lenses. Measuring (stopped-down) button for other automatic Rokkor lenses.

Film speed range: ASA 6-6400, DIN 9-39.

ASA setting: On shutter speed dial. Built in ASA-DIN converting scale on the camera back.

Battery: Mallory RM-625R or its equivalent.

Switch: ON, OFF and battery check switch on the base of the camera. Battery check mark in the finder.

## Focusing

Focusing with fine microprism and Fresnel lens.

Minimum focusing

Distance: 2 ft. (60cm)

Focusing method: Direct helicoid focusing

Others: Infrared pointer

## Mirror

Over-sized quick return mirror with lock-up device

## Others

Built in accessory shoe.

## Size and weight (with F/1.4 lens)

(W) 5.3/4" × (D) 3.1/2" × (H) 3.3/4"  
145mm × 89mm × 94.5mm  
35 oz. (990g)




## Before Using Your Minolta SR-T 101

### ● Insert the Mercury Battery



- 1** Remove the battery chamber cover with your thumb by turning it counter-clockwise. When the cover is removed, place the battery in the chamber with its plus ⊕ side up.

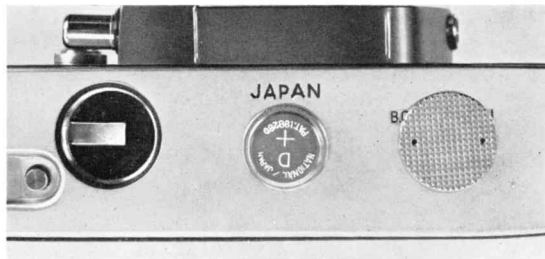


- 2** The Minolta SR-T 101 uses a 1.35V, button-shape mercury battery for photographic applications (Mallory PX-13, PX-625, RM-625R or equivalent)


- Be sure not to touch the battery terminals with moist or unclean hands. If stained, the battery contacts can deteriorate, making the battery inoperative.
- Do not discard a mercury battery in a fire or break it up.
- When the camera is not being used, it is advisable to turn the battery switch on the base of the camera to the "OFF" position.

- If the camera is not to be used for over half a month, remove the battery and store it in a dry place.
- Before putting the battery back in the camera, clean both sides of the battery and the contact lead of the battery chamber with dry cloth.

● How to Use the Battery Checker

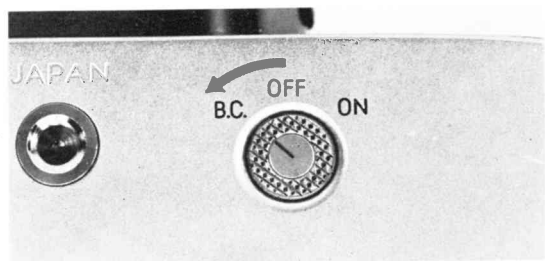


- 1 Turn the battery switch on the base of the camera to the "B.C." position.

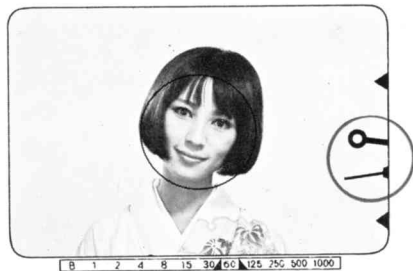

- 2 If the indicator needle points to the check mark as shown in the picture, the battery can be regarded as functioning properly.


## A Quick Guide to Using Your Minolta SR-T 101

1. Open the camera back and insert a standard 20 or 36 exposures 35mm film magazine into the film chamber.

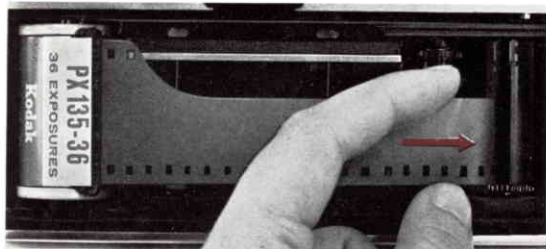

2. Set the film speed on the ASA dial.

3. Advance the film advance lever.

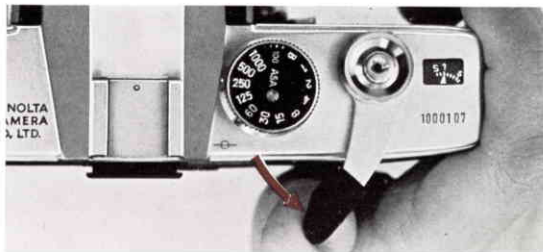


4. Set the proper exposure by turning either the diaphragm or shutter speed ring.


5. Compose your picture and focus.



7. After the film is completely exposed, rewind the film into the magazine.

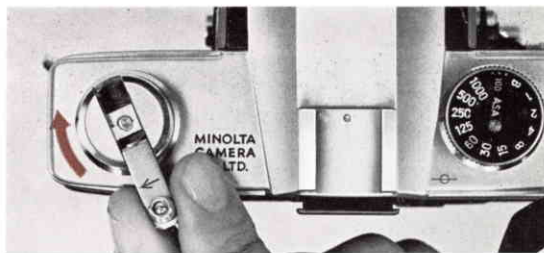


6. Press the shutter release button.

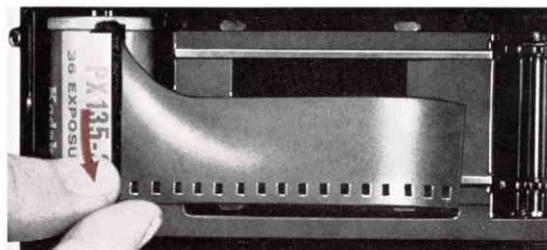


8. Open the camera back and remove the magazine


## Film Loading

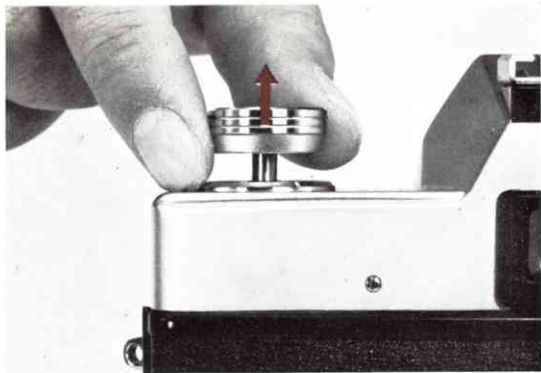


- 1** Raise the back cover open knob (which also incorporates the film rewind knob) until it stops. Then with a slight additional pull, the back cover will automatically “pop” open.

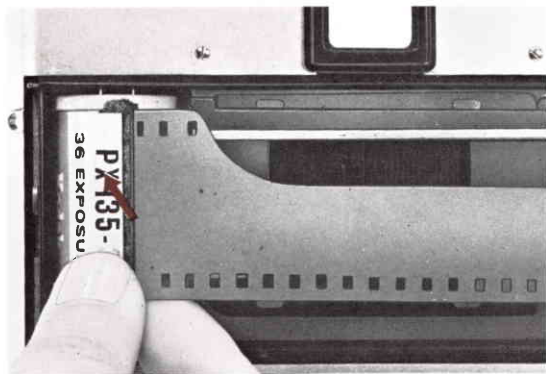


- 2** Place the film magazine into the film chamber and push the back cover open knob all the way down. (When inserting the film magazine, its projecting axis must be placed in a downward position.)

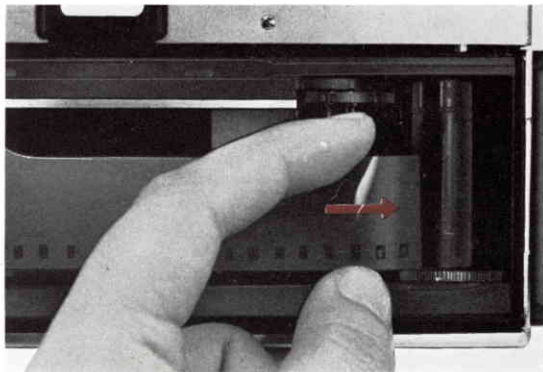


- 3** Insert the film leader into the slot in the film take-up spool, making sure a film perforation is engaged with the tooth in the slot,

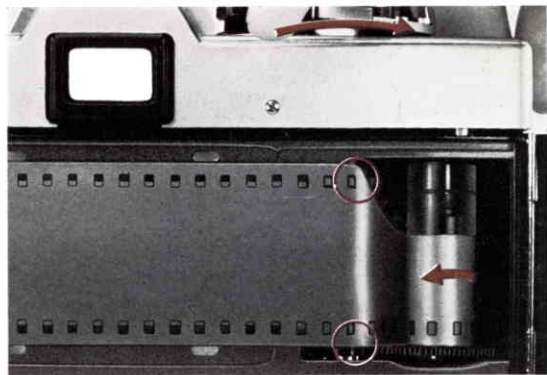

- 4** Advance the film advance lever until the film slot in the take-up spool faces upward  
Advance the film advance lever in several "short" strokes until both sides of the film perforations are securely engaged with the teeth of the sprocket gear. If the film advance lever locks during this procedure, press the shutter release button and then continue.

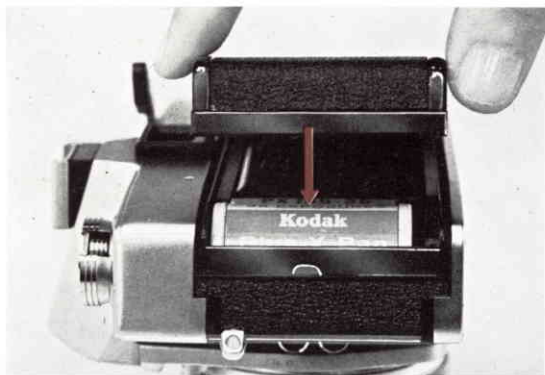


- 5** Close the camera back once you are certain that the film is securely engaged in the take-up spool and on both sides of the sprocket gear. Rotate the film rewind crank gently in the direction of the arrow mark to make sure that the film is flat against the pressure plate.

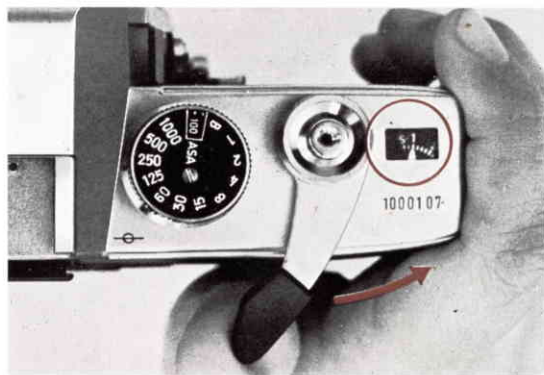

- 6** Advance the film and press the shutter release button. Repeat this action until the number "1" appears at the arrow mark in the film counter window.
- The film counter indicates the number of pictures taken from 1 to 36.
  - The film advance lever has a total "throw" of 170° of this distance, the first 20° have no effect on the film but are intended to provide a "free play" range through which the lever may be "offset" from the body for rapid shooting.
  - When the camera back is opened, the counter automatically resets itself to the start (S) position.

## Shutter Speed and Aperture Settings

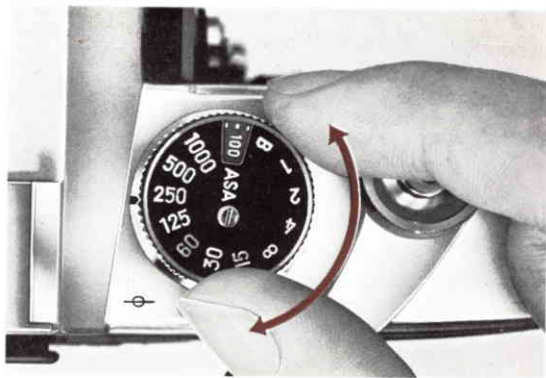

The shutter speed (actually the period of time during which the shutter remains open) works in conjunction with the lens opening (aperture) to determine the amount of light striking the film. The higher the shutter speed, the more effectively it will momentarily "stop" the action of your subject.

To set shutter speed, simply rotate the shutter speed dial until the desired speed is aligned with the red indicator on the camera body, or until it is centered between indicators on the shutter speed scale in the viewfinder.









The figures of B and 1 through 1000 on the shutter




speed dial indicate bulb action and shutter speeds from 1 to 1/1000th second. (At "B" the shutter will remain open indefinitely until pressure is removed from the release button.)

The aperture setting controls the light volume reaching the film in terms of area. In addition it determines the "depth-of-field". (See page 22)



F No.	1.4	2	2.8	4	5.6	8	11	16
Light Volume								
	2	1	1/2	1/4	1/8	1/16	1/32	1/64

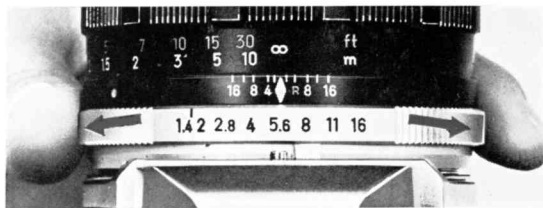

The index for the aperture setting is the diamond ( $\diamond$ ) symbol in front of the diaphragm ring. The ring is engraved with figures from 1.4 through 16 for the MC Rokkor 58mm F/1.4 standard lens.

When the shutter speed remains constant, the light passing through the lens decreases 50% for every increase in the aperture (F) number. (Example: When the diaphragm ring is turned from 2.8 to 4 the light volume decreases 50%.)

As the aperture figure decreases, the light passing through the lens increases. The relation between aperture (F Number) and light volume are shown in the diagram.


- “Click” stops are provided for intermediate aperture settings between any two full F-stops. Intermediate shutter speeds cannot be set.
- The figure “B” on the shutter speed dial is used when an exposure duration of over 1 second is required.
- The red figure of “60” on the shutter speed dial is to be used in conjunction with an electronic flash unit.
- The shutter speed at which the camera is set is shown on the shutter speed scale visible in the viewfinder.
- Since light striking the film is affected by a combination of aperture and shutter speed, exposure can be adjusted by changing either or both settings.

## TTL with CLC, A New Exposure Measuring System

Minolta SR-T 101 camera has through-the-lens measuring system with CLC meter.

Minolta's exclusive, revolutionary CLC (Contrast Light Compensator) promises better photographic results with multiple split exposure measuring system.

Under normal photo-taking conditions this new system gives excellent results, under other conditions, such as high-contrast scene, the CLC feature prevents possible photo failures.

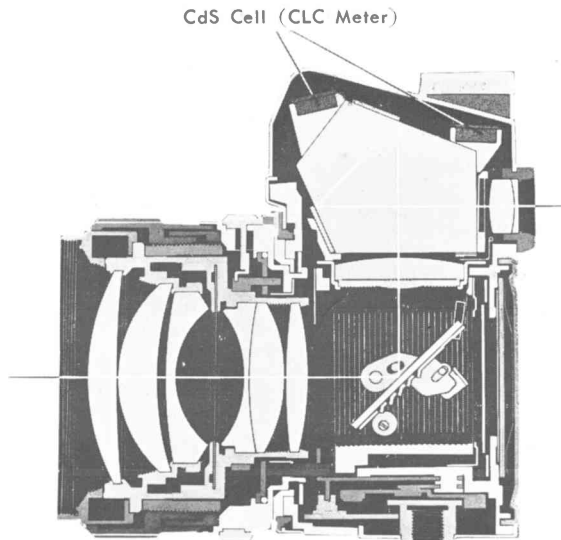

## ASA/DIN Converting Scale



When converting a DIN speed to the corresponding ASA speed or when bearing the film speed in mind, use this converting scale. Turn the knob of the dial and set the film speed to the white pointer marked with ASA. In the case of the ASA 100 film for example, set the film speed as shown in the picture. (The inner graduations are for the DIN).




## Setting the Correct Exposure




The Minolta SR-T 101 is a through-the-lens metering camera which permits viewing and exposure readings with the lens wide open when automatic MC (meter coupling) Rokkor lenses are being used.

When using Rokkor interchangeable lenses without the "MC" designation (any lens designed for Minolta SR-1, SR-3 and SR-7 cameras), light can be accurately measured by using the "stopped-down measurement" system. (See page 33 for instructions.)

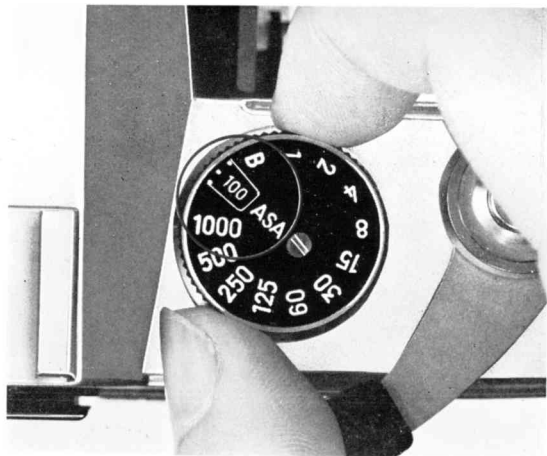

### 1 Set the ASA Speed


Lift and rotate the shutter speed dial until the figure (6 to 6400) which corresponds with the ASA rating of your film is visible in the ASA window.

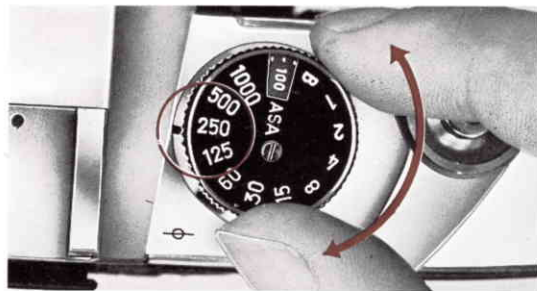

← The shutter speed is indicated in the viewfinder, when you set it on the shutter speed dial.

## 2. Determine Exposure (MC Rokkor lenses only)

When aiming the camera at your subject through the viewfinder, you will see the indicator needle moving. Once the indicator needle has stopped moving, turn the shutter speed dial and/or the diaphragm ring to align the follow-up needle (circle-tipped needle) with the indicator needle.

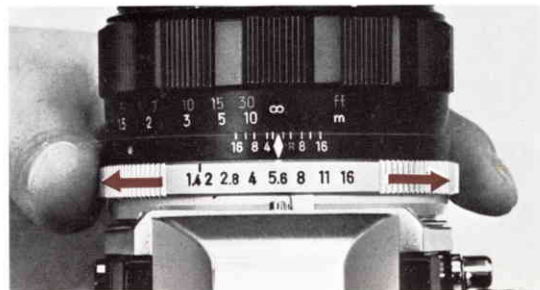

---

On the ASA dial following figures are printed:  
6·10·16·25·50·100·200·400·800·1600·3200  
·6400

The dots (·) denote ASA 8, 12, 20, 32, 40, 64, 80, 125, 160, 250, 320, 500, 640, 1000, 1300, 2000, 2600, 4000 and 5200.

When the proper combination of aperture and shutter speed setting is made for correct exposure, the follow-up needle (which is coupled to the aperture, shutter speed and ASA speed setting) will align with the indicator needle over a range of EV 3 through EV 17 at ASA 100. The EV range will vary with film speed.

It is a recommended procedure to set the shutter speed first (depending on the motion or lack of motion of your subject or the overall lighting) and to then adjust the aperture.

If the needle fails to move when the diaphragm ring is rotated, this signals a need to adjust your shutter speed setting.

A shutter speed scale is visible in the viewfinder which permits you to make all exposure adjustments without removing the camera from your eye.

- 
- 
- When setting the aperture first, be sure not to set the shutter speed between click stops.
  - When the shutter speed is set slower than 1/30th sec., be extremely careful of camera motion while releasing the shutter. It is recommended that a tripod be used at speeds of 1/30th sec. or slower. For "Bulb" setting, a cable release should also be used.
  - When using high-speed film shutter speed of 1/250th sec. is recommended for outdoor photography, and 1/30th sec. for indoor use.
  - When photographing a group of people or a building with great depth-of-field, close down the diaphragm as much as possible. See the depth-of-field on page 22 for details.
- 
-

---

## Holding the Camera

---

The camera may be held horizontally or vertically. In either case, be sure to hold the camera in comfortable position. This will help to prevent movement of the camera during exposure and avoid blurred pictures


- 
- 
- Pressing the camera gently against your face or supporting the elbow of the hand holding the camera against your body will aid in steady holding
  - The camera will tend to move more when used in the vertical position.
- 
- 



## Focusing

---

To focus, hold the camera to your eye and turn the lens focusing ring clockwise or counter-clockwise until a sharp image appears in the center spot of the viewfinder. This center spot, microprism, consists of many diagonal lines which will aid in ultra-sharp and rapid focusing.

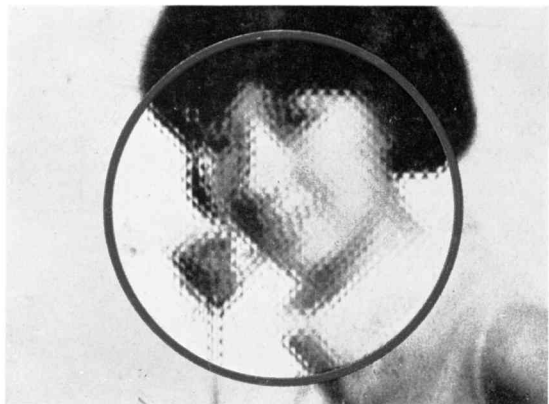

Out of focus



In focus



## Lens Aperture Controls Depth-of-Field



When the lens is accurately focused on a subject, there is a certain depth, both in the foreground and the background, which is also considered to be in focus. This area is known as the “depth-of-field”

The sharp focus area in the foreground is usually shallower than the sharp focus area in the background.

Depth-of-field has the following characteristics which should be considered when pictures are composed.




1. As the lens aperture decreases, the area of sharp focus increases. As lens aperture increases, the area of sharp focus decreases.
2. As your distance from camera to subject is increased, so is your area of sharp focus.
3. A telephoto lens has a shallower depth-of-field than a wide angle lens.

Full aperture opening

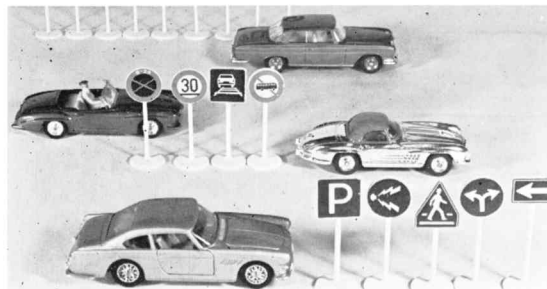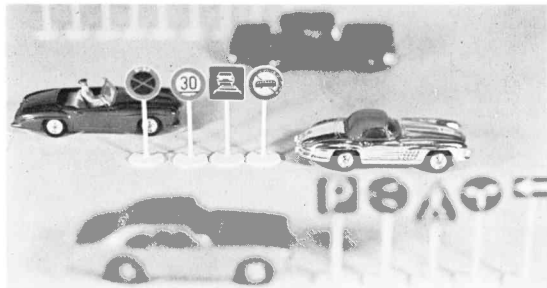

Small aperture opening

The depth-of-field scale engraved on lens barrel enables you to determine the depth-of-field at which you will be in focus. For example, if you focus on a subject 10 feet away and use an  $f/8$  aperture, read the distance opposite the two figures 8. In this case the picture will be sharp from approximately 8 to 12 feet.

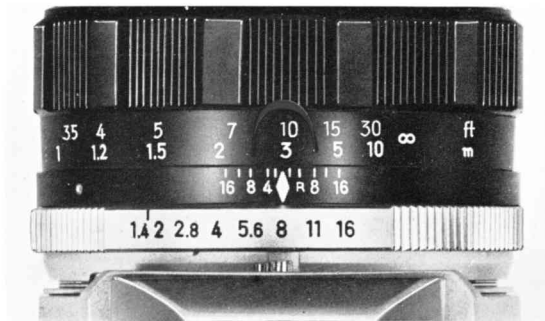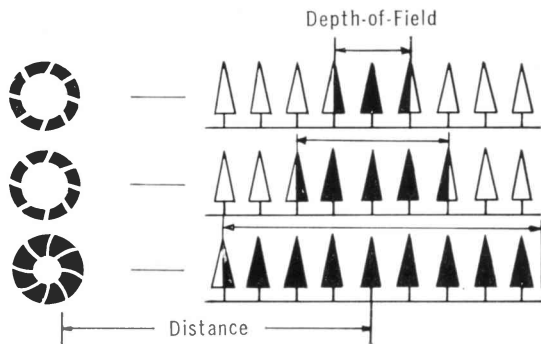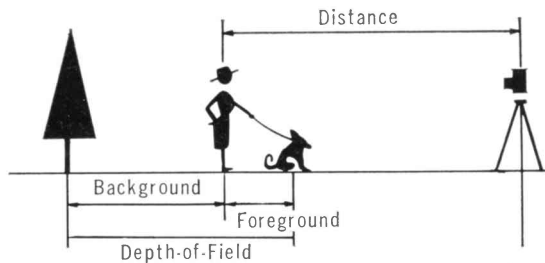

# Depth-of-Field Table of MC Rokkor 58mm F/14. Lens

F No. Dist.(ft)	1.4	2	2.8	4	5.6	8	11	16
∞	244' ∞	171' ∞	121' ∞	85' ∞	61' ∞	43' ∞	30' ∞	22' ∞
30	26' 9" 34' 2"	25' 7" 36' 3"	24' 1" 39' 9"	22' 4" 45' 11"	20' 2" 59'	17' 9" 98'	15' 2" ∞	12' 8" ∞
15	14' 2" 15' 11"	13' 10" 16' 5"	13' 5" 17' 1"	12' 10" 18' 1"	12' 1" 19' 9"	11' 3" 22' 9"	10' 2" 29'	9' 47' 7"
10	9' 8" 10' 5"	9' 6" 10' 7"	9' 3" 10' 10"	9' 11' 3"	8' 8" 11' 10"	8' 2" 12' 11"	7' 7" 14' 8"	6' 11" 18' 2"
7	6' 10" 7' 2"	6' 9" 7' 3"	6' 8" 7' 5"	6' 6" 7' 7"	6' 4" 7' 10"	6' 1" 8' 3"	5' 9" 8' 11"	5' 5" 10' 1"
5	4' 11" 5' 1"	4' 10" 5' 2"	4' 10" 5' 2"	4' 9" 5' 3"	4' 8" 5' 5"	4' 6" 5' 7"	4' 4" 5' 10"	4' 2" 6' 4"
4	3' 11" 4' 1"	3' 11" 4' 1"	3' 11" 4' 1"	3' 10" 4' 2"	3' 9" 4' 3"	3' 8" 4' 4"	3' 7" 4' 6"	3' 5" 4' 9"
3.5 (3'6")	3' 5½" 3' 6½"	3' 5¼" 3' 6¾"	3' 4" 3' 7"	3' 4½" 3' 7½"	3' 4" 3' 8¼"	3' 3¼" 3' 9¼"	3' 2¼" 3' 10¾"	3' ¾" 4' ¾"
3	2' 11¾" 3' ½"	2' 11½" 3' ½"	2' 11¼" 3' ¾"	2' 10" 3' 1"	2' 10½" 3' 1½"	2' 10" 3' 2¼"	2' 9¼" 3' 3¼"	2' 8¼" 3' 4¾"
2.75 (2'9")	2' 8¾" 2' 9¼"	2' 8½" 2' 9½"	2' 8½" 2' 9¾"	2' 8¼" 2' 9¾"	2' 7¾" 2' 10¼"	2' 7½" 2' 10¾"	2' 6¾" 2' 11¾"	2' 6" 3' ¾"
2.5 (2'6")	2' 5¾" 2' 6¼"	2' 5¾" 2' 6½"	2' 5½" 2' 5½"	2' 5¼" 2' 6¾"	2' 5" 2' 7"	2' 4¾" 2' 7½"	2' 4¼" 2' 8¼"	2' 3½" 2' 9"
2.25 (2'3")	2' 2¾" 2' 3¼"	2' 2¾" 2' 3¼"	2' 2¾" 2' 3½"	2' 2¾" 2' 3½"	2' 2¼" 2' 3¾"	2' 2" 2' 4¼"	2' 1½" 2' 4¾"	2' 1" 2' 5½"
2	1' 11¾" 2' ¼"	1' 11¾" 2' ¼"	1' 11¾" 2' ¼"	1' 11¾" 2' ½"	1' 11½" 2' ¾"	1' 11¼" 2' ¾"	1' 10¾" 2' 1¼"	1' 10½" 2' 1¾"

# Depth-of-Field Table of MC Rokkor 55mm F/1.7 Lens

FNo. Dist. ft.	1.7	2	2.8	4	5.6	8	11	16
∞	∞ 175'	∞ 151'	∞ 107'	∞ 75' 5"	∞ 53' 5"	∞ 37' 9"	∞ 26' 9"	∞ 19'
30	36' 1" 25' 8"	37' 4" 25' 1"	41' 6" 23' 6"	49' 5" 21' 7"	67' 7" 19' 4"	141' 16' 10"	∞ 14' 3"	∞ 11' 9"
15	16' 4" 13' 10"	16' 7" 13' 8"	17' 4" 13' 2"	18' 7" 12' 7"	20' 8" 11' 10"	24' 6" 10' 10"	33' 2" 9' 9"	67' 4" 8' 6"
10	10' 7" 9' 5 <sup>7</sup> / <sub>8</sub> "	10' 8" 9' 4 <sup>7</sup> / <sub>8</sub> "	10' 12" 9' 2 <sup>1</sup> / <sub>4</sub> "	11' 5" 8' 10 <sup>5</sup> / <sub>8</sub> "	12' 2" 8' 5 <sup>7</sup> / <sub>8</sub> "	13' 5" 7' 11 <sup>7</sup> / <sub>8</sub> "	15' 7" 7' 4 <sup>5</sup> / <sub>8</sub> "	20' 5" 6' 8"
7	7' 3 <sup>1</sup> / <sub>4</sub> " 6' 8"	7' 3 <sup>3</sup> / <sub>4</sub> " 6' 8 <sup>1</sup> / <sub>2</sub> "	7' 5 <sup>1</sup> / <sub>2</sub> " 6' 7 <sup>1</sup> / <sub>4</sub> "	7' 7 <sup>7</sup> / <sub>8</sub> " 6' 5 <sup>3</sup> / <sub>8</sub> "	7' 11 <sup>3</sup> / <sub>4</sub> " 6' 2 <sup>7</sup> / <sub>8</sub> "	8' 5 <sup>5</sup> / <sub>8</sub> " 5' 11 <sup>3</sup> / <sub>4</sub> "	9' 3 <sup>3</sup> / <sub>8</sub> " 5' 7 <sup>5</sup> / <sub>8</sub> "	10' 9" 5' 2 <sup>5</sup> / <sub>8</sub> "
5	5' 1 <sup>1</sup> / <sub>2</sub> " 4' 10 <sup>1</sup> / <sub>2</sub> "	5' 1 <sup>7</sup> / <sub>8</sub> " 4' 10 <sup>1</sup> / <sub>4</sub> "	5' 2 <sup>5</sup> / <sub>8</sub> " 4' 9 <sup>5</sup> / <sub>8</sub> "	5' 3 <sup>3</sup> / <sub>4</sub> " 4' 8 <sup>3</sup> / <sub>8</sub> "	5' 5 <sup>1</sup> / <sub>2</sub> " 4' 7 <sup>3</sup> / <sub>8</sub> "	5' 8 <sup>1</sup> / <sub>8</sub> " 4' 5 <sup>5</sup> / <sub>8</sub> "	6' 1 <sup>4</sup> / <sub>4</sub> " 4' 3 <sup>3</sup> / <sub>8</sub> "	6' 7" 4' 1 <sup>1</sup> / <sub>2</sub> "
4	4' 1" 3' 11 <sup>1</sup> / <sub>8</sub> "	4' 1 <sup>1</sup> / <sub>4</sub> " 3' 11"	4' 1 <sup>5</sup> / <sub>8</sub> " 3' 10 <sup>1</sup> / <sub>2</sub> "	4' 2 <sup>3</sup> / <sub>8</sub> " 3' 9 <sup>7</sup> / <sub>8</sub> "	4' 3 <sup>3</sup> / <sub>8</sub> " 3' 9 <sup>1</sup> / <sub>8</sub> "	4' 4 <sup>7</sup> / <sub>8</sub> " 3' 8"	4' 7 <sup>1</sup> / <sub>4</sub> " 3' 6 <sup>1</sup> / <sub>2</sub> "	4' 11" 3' 4 <sup>1</sup> / <sub>2</sub> "
3.5	3' 6 <sup>3</sup> / <sub>4</sub> " 3' 5 <sup>3</sup> / <sub>8</sub> "	3' 6 <sup>7</sup> / <sub>8</sub> " 3' 5 <sup>1</sup> / <sub>4</sub> "	3' 7 <sup>1</sup> / <sub>4</sub> " 3' 4 <sup>7</sup> / <sub>8</sub> "	3' 7 <sup>3</sup> / <sub>4</sub> " 3' 4 <sup>3</sup> / <sub>8</sub> "	3' 8 <sup>1</sup> / <sub>2</sub> " 3' 3 <sup>3</sup> / <sub>4</sub> "	3' 9 <sup>5</sup> / <sub>8</sub> " 3' 3"	3' 11 <sup>1</sup> / <sub>4</sub> " 3' 1 <sup>3</sup> / <sub>4</sub> "	4' 2" 3' 1 <sup>4</sup> / <sub>4</sub> "
3	3' 1 <sup>1</sup> / <sub>2</sub> " 2' 11 <sup>1</sup> / <sub>2</sub> "	3' 5 <sup>5</sup> / <sub>8</sub> " 2' 11 <sup>3</sup> / <sub>8</sub> "	3' 7 <sup>7</sup> / <sub>8</sub> " 2' 11 <sup>1</sup> / <sub>8</sub> "	3' 1 <sup>1</sup> / <sub>4</sub> " 2' 10 <sup>1</sup> / <sub>8</sub> "	3' 1 <sup>3</sup> / <sub>4</sub> " 2' 10 <sup>3</sup> / <sub>8</sub> "	3' 2 <sup>1</sup> / <sub>2</sub> " 2' 9 <sup>3</sup> / <sub>4</sub> "	3' 3 <sup>3</sup> / <sub>4</sub> " 2' 9"	3' 5 <sup>1</sup> / <sub>2</sub> " 2' 7 <sup>3</sup> / <sub>4</sub> "
2.5	2' 6 <sup>3</sup> / <sub>8</sub> " 2' 5 <sup>3</sup> / <sub>4</sub> "	2' 6 <sup>3</sup> / <sub>8</sub> " 2' 5 <sup>5</sup> / <sub>8</sub> "	2' 6 <sup>1</sup> / <sub>4</sub> " 2' 5 <sup>1</sup> / <sub>2</sub> "	2' 6 <sup>3</sup> / <sub>4</sub> " 2' 5 <sup>1</sup> / <sub>4</sub> "	2' 7 <sup>1</sup> / <sub>8</sub> " 2' 4"	2' 7 <sup>3</sup> / <sub>4</sub> " 2' 4 <sup>1</sup> / <sub>2</sub> "	2' 8 <sup>3</sup> / <sub>8</sub> " 2' 4"	2' 9 <sup>5</sup> / <sub>8</sub> " 2' 3 <sup>1</sup> / <sub>4</sub> "
2.25	2' 3 <sup>1</sup> / <sub>4</sub> " 2' 2 <sup>3</sup> / <sub>4</sub> "	2' 3 <sup>1</sup> / <sub>4</sub> " 2' 2 <sup>3</sup> / <sub>4</sub> "	2' 3 <sup>3</sup> / <sub>8</sub> " 2' 2 <sup>5</sup> / <sub>8</sub> "	2' 3 <sup>5</sup> / <sub>8</sub> " 2' 2 <sup>3</sup> / <sub>8</sub> "	2' 3 <sup>7</sup> / <sub>8</sub> " 2' 2 <sup>1</sup> / <sub>4</sub> "	2' 4 <sup>1</sup> / <sub>4</sub> " 2' 1 <sup>3</sup> / <sub>4</sub> "	2' 4 <sup>7</sup> / <sub>8</sub> " 2' 1 <sup>3</sup> / <sub>8</sub> "	2' 5 <sup>3</sup> / <sub>4</sub> " 2' 1 <sup>3</sup> / <sub>4</sub> "
2	2' 1 <sup>1</sup> / <sub>8</sub> " 1' 11 <sup>7</sup> / <sub>8</sub> "	2' 1 <sup>1</sup> / <sub>8</sub> " 1' 11 <sup>7</sup> / <sub>8</sub> "	2' 1 <sup>1</sup> / <sub>4</sub> " 1' 11 <sup>3</sup> / <sub>4</sub> "	2' 1 <sup>1</sup> / <sub>2</sub> " 1' 11 <sup>5</sup> / <sub>8</sub> "	2' 1 <sup>3</sup> / <sub>4</sub> " 1' 11 <sup>3</sup> / <sub>8</sub> "	2' 1" 1' 11 <sup>1</sup> / <sub>8</sub> "	2' 1 <sup>1</sup> / <sub>2</sub> " 1' 10 <sup>3</sup> / <sub>4</sub> "	2' 2" 1' 10 <sup>1</sup> / <sub>4</sub> "




## Checking the Effects of Aperture Setting on Depth-of-Field

MC Rokkor lenses are designed with a meter coupler which permits them to remain wide open during viewing, focusing and exposure setting. In order to check your depth-of-field when using these lenses, push the diaphragm button on the camera body after the aperture has been set.

When using other Rokkor lenses designed for the Minolta SR-1, SR-3 or SR-7 use the preview button on the lens barrel or the camera's diaphragm button.

- When the diaphragm (stop-down) button is pushed, **after** you advance the film, the diaphragm closes down to the pre-set aperture and locks. When the button is pressed again, the diaphragm fully reopens.

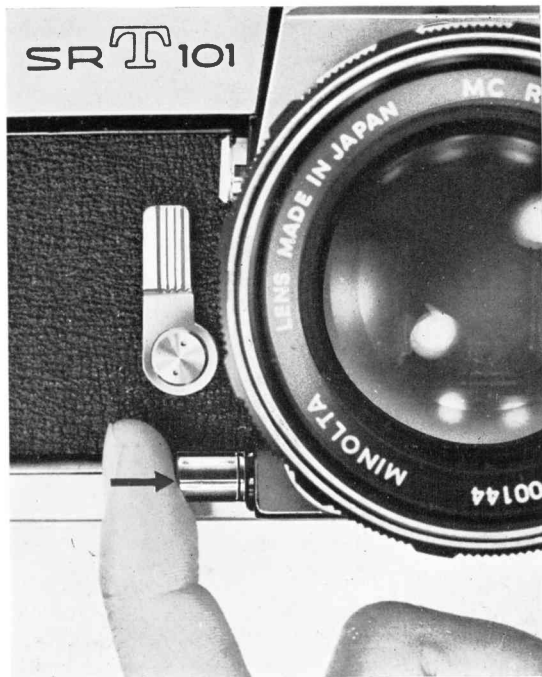

## Mirror Lock-Up Control


The mirror lock-up control is used in conjunction with the Rokkor 21mm ultra wide angle lens. When activated, the mirror is locked in an "up" position to prevent it from coming into contact with the rear element of the lens which intrudes into the camera body.

To operate, turn the mirror lock button downward (clockwise) until it stops. The distance of movement is approximately 135°.

The mirror will return to its usual operation when the lock button is returned to the red mark.

The mirror lock button operates independently of the shutter release and film advance and can, therefore, be activated at any time.

The mirror lock-up system is also helpful for micro, sequence and close-up photography as it eliminates the possibility of camera motion caused by the movement of the mirror when the shutter is released.

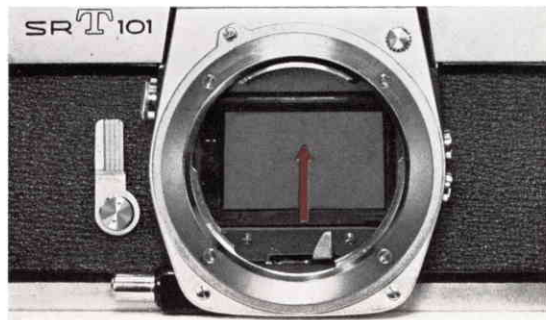

- When the mirror is locked in an "up" position, the exposure meter of the camera cannot operate, and an independent meter must be used.


---

## How to Use the Self-Timer

---

The self-timer delays shutter release about 10 seconds from the time you press the self-timer release button. This allows time for you to get into the picture.

To operate, advance the film (This will automatically cock the shutter). Next, push the self-timer lever down (about 90°) and then press the self-timer release button. The self-timer is now operating, and the shutter will automatically be released after about 10 seconds.

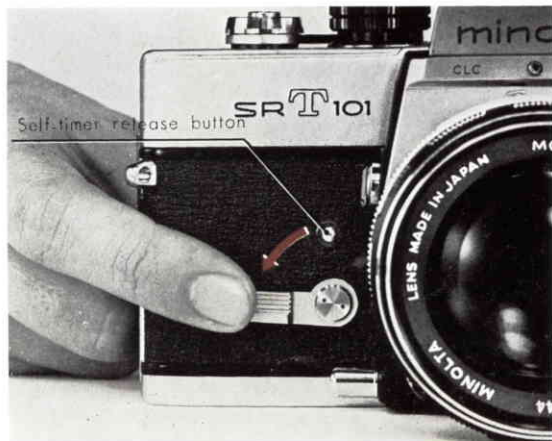

- 
- If the film has not been advanced, the self-timer lever will stop after returning about 45° and the shutter will not be released.
  - You can over-ride the self-timer mechanism by pushing the shutter release button either before or after the self-timer has been activated.
-



---

## Infrared Mark for Infrared Photography

---

When using infrared film it is necessary to make an "infrared focus adjustment." After you have made your normal focusing adjustment, turn the focusing ring to the right to align the distance on the focusing scale with the red "R" mark on the depth-of-field scale. After this adjustment has been made you are ready to shoot.


- To determine correct exposure for infrared photography, consult the instructions that are enclosed in the film package.




---

## Symbol Aides Close-Up Photography

---

The  symbol engraved to the left of the film advance lever shows the exact position of the film in the camera. It is used to precisely measure the distance from subject to film for macro and close-up photography.

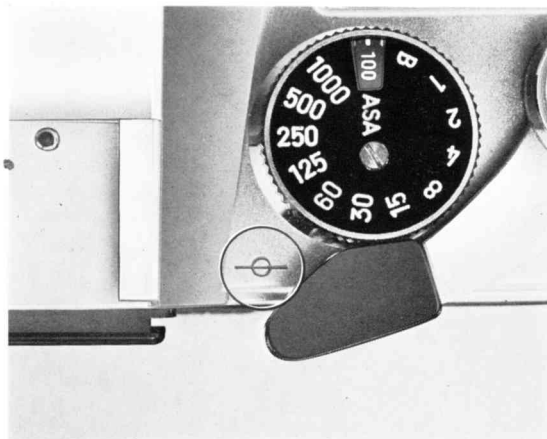

## Flash Photography

Flash bulbs and electronic flash units are recommended for indoor and night photography and for shooting in shaded areas.

There are two synchro terminals on the Minolta SR-T 101; one is designated "FP"; the other, "X".

When using an electronic flash unit, set the shutter speed at 1/60th sec. (red figure on dial), and use the "X" terminal.

When using "FP" class bulbs, you can use any shutter speed from 1 to 1/1000th sec., as the flash bulbs synchronize with the release of the shutter. A shutter speed above 1/60th sec., should be used in photographing a moving subject with comparatively bright surrounding light.

The relation between flash bulbs and shutter speeds are shown in the following table :


### Shutter Speeds for Flash Photography

(The shaded area indicates adequate shutter speeds)

Terminal	Flash Bulb	Shutter Speed (Seconds)												
		B	1	1/2	1/4	1/8	1/15	1/30	1/60	1/125	1/250	1/500	1/1000	
FP Terminal	FP Bulb													
	F Bulb													
X Terminal	M Bulb													
	Electronic Flash													

### ● Attaching Flash Unit

Slide the shoe of the flash unit into the camera's accessory shoe from the back of the camera, then tighten the screw of the flash unit for secure, wobble-free operation.

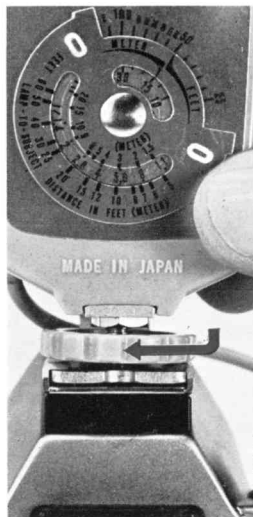

---

## ● Exposure for Flash Photography


To determine the correct aperture for flash photography, determine the "guide number" of the flash bulb you are using. Then make this simple computation:

$$\frac{\text{Guide Number}}{\text{Distance to Subject}} = \text{Aperture Setting (F-stop)}$$

For example, when the "guide number" of the flash bulb is 80 and the distance to the subject is 10 feet (with ASA 100 film, using a shutter speed of 1/60th sec.) the F-stop is:  $\frac{80}{10} = 8$

---

## How to Unload the Film

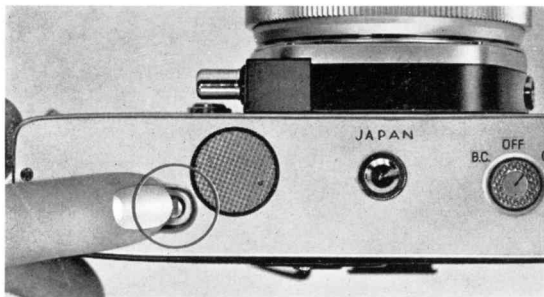


- 1 To unload the film depress the rewind button on the base of the camera. The button will remain depressed when you remove your finger. (If, however, it returns to its original position, rewind the film for approximately 2 revolutions while depressing the button. Then turn the film advance lever completely without depressing the button. And depress it again. This should lock it in the depressed position.)

- 
- When using M class flash bulbs, a shutter speed of 1/15th sec. or slower is recommended.
  - Use "blue" flash bulbs for color photography.



- 2** Lift the rewind crank and turn it clockwise. This will rewind the film into the magazine. When you feel a slight resistance, you have rewound nearly all the film and it has disengaged from the take-up spool. After one or two more turns you can assume all the film has been rewound into the magazine.

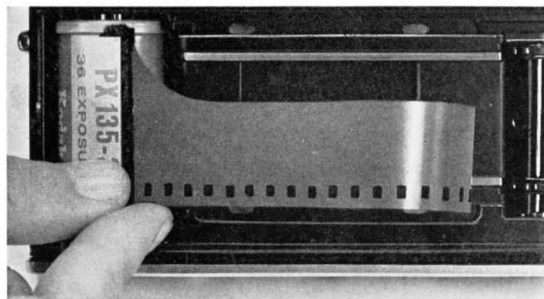

- 3** Now, pull the rewind knob up to open the camera back and remove the film magazine.

- The film rewind release button will automatically return to its original position as soon as the film advance lever is activated.

## Changing Lenses



Lenses can be changed even when the film has been advanced and the shutter cocked. To remove the mounted lens, push the lens release button down and rotate the lens counter-clockwise until it stops. It can now be lifted out.



To mount a lens, insert it into the bayonet socket by lining up the red dot on the lens barrel with the red dot on the camera body. Now, turn the lens clockwise until it stops with a "click."



### Caution :

- Touch nothing inside the bayonet mount while lens is removed.
- If the lens is removed, place a body cap to prevent dust from collecting on the mirror and shutter mechanism.

## Using Interchangeable Rokkor Lenses other than MC Lenses

When using Rokkor Lenses designed for the Minolta SR-1, SR-3 or SR-7, which do not have a meter coupling pin, you must use the "stopped-down measurement system" to set exposure.

With this system the indicator needle moves when the lens diaphragm is opened or closed and the follow-up (circle-tipped) needle is activated by the shutter speed control.

### ● Auto Rokkor Lenses

- 1) Advance the film.
- 2) Press the diaphragm stop-down button (it will remain depressed).
- 3) Set the shutter speed.
- 4) Turn the diaphragm ring until the two needles are aligned. (The diaphragm can be set first.)
- 5) Press the diaphragm stop-down button again.
- 6) Focus and shoot.



- The diaphragm stop-down button will not operate if the film advance lever has not been advanced completely.
- When the diaphragm stop-down button is pressed the second time, the diaphragm reopens to maximum aperture.
- When the shutter is released, the diaphragm automatically closes down to the preset aperture and reopens.

## ● Manual Pre-Set Rokkor Lenses



- 1) Set the shutter speed.
- 2) Set the maximum aperture of the lens, then close down until the two needles are aligned.
- 3) Release the shutter.

- It is not necessary to use the diaphragm stop-down button, with manual pre-set lenses.
- Compose and focus your picture before making your exposure setting.
- If you focus or compose your picture after making your exposure setting, and you do this by opening the lens to maximum aperture, be sure to close it down again to the proper point before you shoot.

### NOTE

- a) The indicator needle moves when the aperture is adjusted.
- b) The follow-up needle moves when the shutter speed is adjusted.
- c) A complete system of interchangeable lenses and accessories are available for the Minolta SR-T 101.

---

## Maintenance and Care of the Camera

---

### Care after Use

Don't touch the lens with hand. If you inadvertently stain it, use a rubber ball blower to blow off dust from its surface, gently wipe its surface outwardly from the center with a lens cleaning cloth or tissue.

- Try to keep the lens clean. Brush it with a soft brush from time to time.
- Don't touch the mirror, but brush it with a soft brush.
- When the aventurine chrome-plated surface is stained too much, wipe it with a cloth dipped in benzine. In this case, exercise caution so that benzine may not enter inside.

### CAUTION

An excess amount of liquid lens cleaner may damage the lens. Therefore, a liquid cleaner is not recommended.

### Caution in Maintenance

- When storing the camera, set the distance scale to  $\infty$ , release the shutter, and put the camera in the leather case.
- Do not drop or jar the camera.
- Do not store the camera in high temperature or humidity.
- When leaving the camera unused for a long time, remove the mercury battery from the camera.
- When storing the camera for a long period of time, put in original packaging with a small bag of Silca Gel. The Silca Gel is a drying agent.



---

## Interchangeable Rokkor Lenses for Minolta SR-T 101

---

Over 30 different types of interchangeable Rokkor lenses from 18mm ultra wide angle to 1000mm super telephoto are available for SR-T 101 camera.

Among them, MC Rokkor lenses can be used in full-aperture measuring system with SR-T. Other conventional Rokkor lenses, automatic or manual pre-set lenses, can be used in stopped-down (closing diaphragm) measuring system with SR-T. For detail see next page.



**TABLE OF INTERCHANGEABLE MC ROKKOR LENSES WITH FULL APERTURE MEASUREMENT**

Types	Foocal length- Lens opening	Lens element (Group)	Angle of view	Filter screw diameter	Lens shade diameter
Ultra-wide	28mm F3.5	7(7)	76°	55mm	55mm
Wide	35mm F2.8	7(6)	64°	52	54
Standard	55mm F1.7	6(5)	43°	52	52
	58mm F1.4	6(5)	41°	55	55
Telephoto	100mm F3.5	5(4)	24°	52	52
	100mm F2	6(5)	24°	62	62
	135mm F3.5	4(4)	18°	52	52
	135mm F2.8	6(5)	18°	55	55
	200mm F4.5	5(5)	12°	52	
	200mm F3.5	6(4)	12°	62	
Macro	50mm F3.5	6(4)	45°	55	

Lens shade type	Minimum focus dist.	Dimension Dia. × L.	Weight	Diaphragm
Screw-in	2 ft. ( 60cm )	63 × 45mm	8.6 oz (245g)	Auto
Slip-on	1.25 ( 40 )	63 × 45	7.4 (210)	"
Screw-in	1.8 ( 50 )	63 × 37	7.9 (225)	"
	2 ( 60 )	65 × 41	9.7 (275)	"
"	4 (120)	63 × 54	8.5 (240)	"
"	4 (120)	66 × 63	15 (425)	"
"	5 (150)	63 × 88	14.1 (400)	"
"	5 (150)	62 × 93	15.8 (450)	"
Built-in	8 (250)	63 × 130	17.6 (500)	"
"	8 (250)	70 × 136	26.4 (750)	"
	0.9 ( 23 )	68 × 55	11.6 (330)	"

## TABLE OF INTERCHANGEABLE ROKKOR LENSES WITH STOP-DOWN MEASUREMENT

Types	Focal length- Lens opening	Lens element (Group)	Angle of view	Filter screw diameter	Lens shade diameter	Lens shade type
Ultra-wide	18mm F9.5 21mm F4	7(5) 8(4)	180° 92°	37.5mm 55	39.5mm No need	Bayonet
Wide	35mm F4	5(4)	64°	55	57	Slip-on
Semi-wide	45mm F2.8	4(3)	52°	46	48	"
Standard	55mm F2	6(5)	43°	52	52	Screw-in
Telephoto	100mm F3.5 100mm F4 135mm F4 200mm F5 300mm F5.6 300mm F4.5 600mm F5.6 1000mm F6.3	5(4) 3(3) 3(3) 5(4) 4(4) 4(4) 4(3)	24° 24° 18° 12° 8° 8° 4° 2.5°	55 46 46 52 62 77 126 49	57 48 48 52 62 77 126 200	Slip-on " " Screw-in Screw-in " " "
Zoom	50-100mm F3.5 80-160mm F3.5 100-200mm F5.6 160-500mm F8	15(9) 15(10) 8(5) 16(11)	46-24° 36-15° 24-12° 15- 5°	77 77 52 77	77 77 52 77	" " " "
For Bellows	135mm F4	3(3)	18°	46	48	Slip-on

APERTURE 1.7-16

Minimum focus dist.	Dimension Dia. × L.	Weight	Diaphragm
Fixed focus 3 ft ( 90cm )	60 × 48mm 60 × 20	8.5 oz. (240g) 5.8 (166)	Manual "
1.3 ( 40 )	60 × 34	10.7 (305)	Preset
3 ( 90 )	64 × 17	4.6 (130)	Auto
1.75 ( 50 )	60 × 35	7.2 (205)	"
4 (120)	63 × 59	10.9 (310)	"
4 (120)	56 × 80	8.5 (240)	Preset
5 (150)	56 × 115	13.7 (375)	"
8 (250)	56 × 149	15.1 (430)	Auto
15 (450)	65 × 197	19.2 (545)	Preset
15 (450)	80 × 250	36 (1,020)	"
33 ( 10m )	132 × 530	1.3 lb ( 4.7kg )	"
100 ( 30m )	217 × 450	23.2 lb (10.6kg)	ND filters
6.6 (200cm)	82 × 126	30 oz (855g)	Auto
8.3 (250)	84 × 207	47.8 (1,350)	"
7 (200)	58 × 175	19.5 (535)	Preset
15 (450)	87 × 490	6.1 lb (2.7kg)	Auto
1.8 ( 46 )	56 × 55	7.1 (200)	Preset



*Minolta masters photography*

**Minolta**

MINOLTA CAMERA CO., LTD.

Printed in Japan

SRT-804 IE

[www.orphancameras.com](http://www.orphancameras.com)